



- |   |  |  |  |
|---|--|--|--|
| <b>JS4 option</b><br>1 AUX 0<br>2 AUX 1<br>3 AUX 2<br>4 AUX 3<br>5 AUX 4<br>6 AUX 5<br>7 AUX 6<br>8 AUX 7 | <b>JS3 option</b><br>1 RXD 2<br>2 RXD 3<br>3 RXD 1<br>4 TXD 2<br>5 TXD 3<br>6 TXD 1<br>7 +12Vout 0.2A<br>8 GND | <b>JS2 Extra mik/mic</b><br>1 +8V<br>2 Mic 2<br>3 PTT/Mic gnd<br>4 AF out<br>5 SW 1<br>6 SW 2<br>7 GND<br>8 SW 3 | <b>JS1 Man/Control unit</b><br>1 +8V<br>2 Mic 1<br>3 PTT/Mic gnd<br>4 AF out<br>5 SW 1<br>6 TXDE<br>7 GND<br>8 ON/RXDF |
|---|--|--|--|

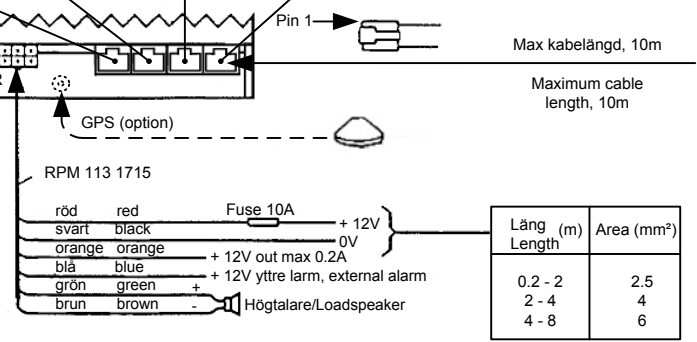

Det totala strömuttaget får ej överstiga 200 mA på JS3 och power kontakten.  
Maximum current should not exceed 200 mA on JS3 and power connector.

- J1
- |               |
|---------------|
| 1 +8V         |
| 2 Mic         |
| 3 PTT/Mic gnd |
| 4 AF out      |
| 5 SW 1        |
| 6 SW 2        |
| 7 GND         |
| 8 SW 3        |

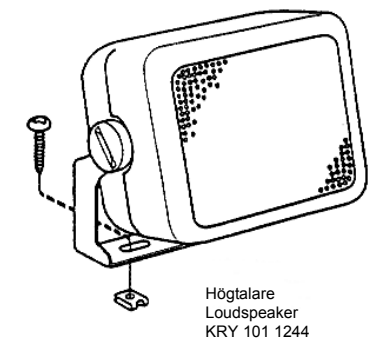

|   |                             |                        |            |
|---|-----------------------------|------------------------|------------|
|   |                             | Dokument nr<br>TC-4402 | Filnamn    |
| Benämning<br><b>Installationsritning Aurora C50</b> |                             |                        |            |
| Ritad<br>Olov Hellström                             | Dokansv/Godk<br>Rune Tapper | Datum<br>2005-08-23    | Rev<br>R1E |